

3.5. RECEIVER OUTFIT CAT

DATE OF DESIGN. 1952

HANDBOOK. B.R. 2169

ESTABLISHMENT LIST. E.1065

FREQUENCY RANGE. 60 kc/s to 32 Mc/s

POWER SUPPLY. 100–125 V, or 200–250 V a.c., 50 c/s

POWER CONSUMPTION. 50 W (approx.)

GENERAL

1. The receiver operates as a single or double super-heterodyne requiring a separate power pack. Used in conjunction with associated transmitter type 619 or 619H.

2. Frequency Range

Range 1. – 60–125 kc/s	} i.f. 460 kc/s.
„ 2. – 100–260 kc/s	
„ 3. – 260–660 kc/s	i.f. 1.4 Mc/s and 460 kc/s.
„ 4. – 0.66–1.5 Mc/s	} i.f. 460 kc/s.
„ 5. – 1.5–3.4 Mc/s	
„ 6. – 3.4–7.0 Mc/s	} i.f. 1.4 Mc/s and 460 kc/s.
„ 7. – 7.0–15 Mc/s	
„ 8. – 15–32 Mc/s	

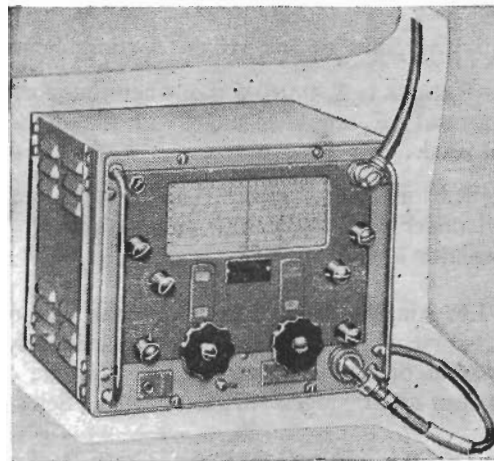


FIG. 1