
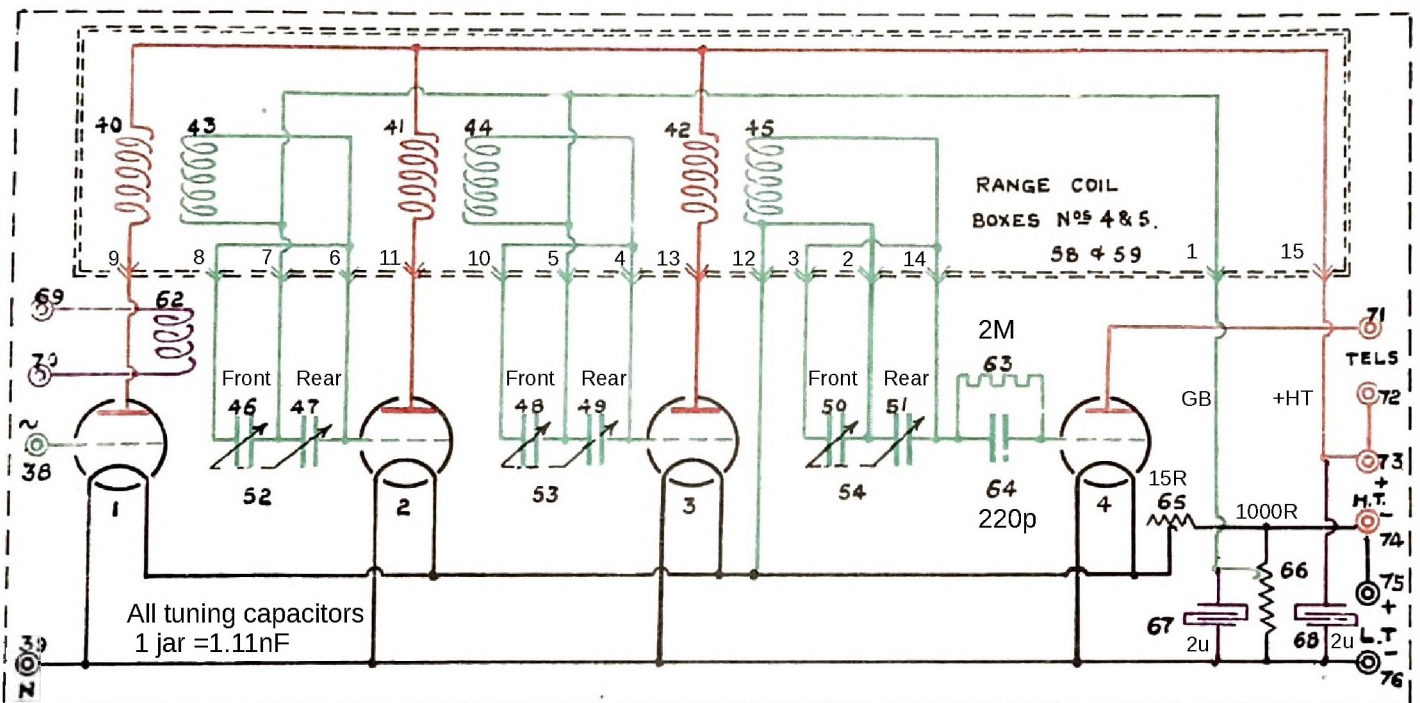
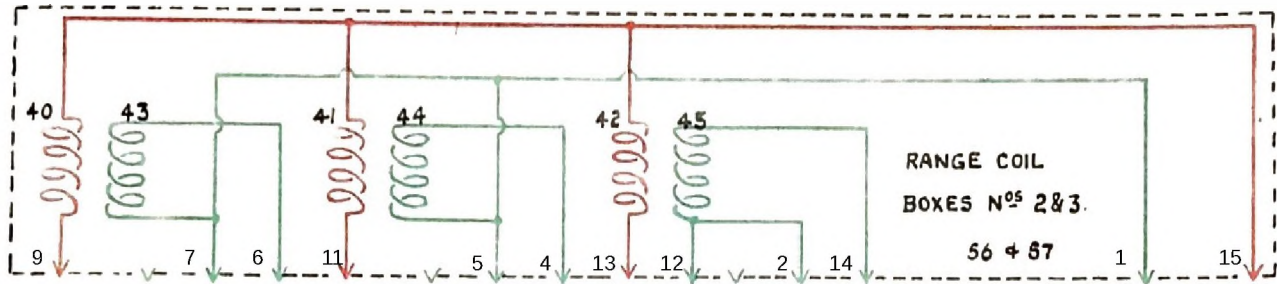


M11 Circuit and wiring Diagrams

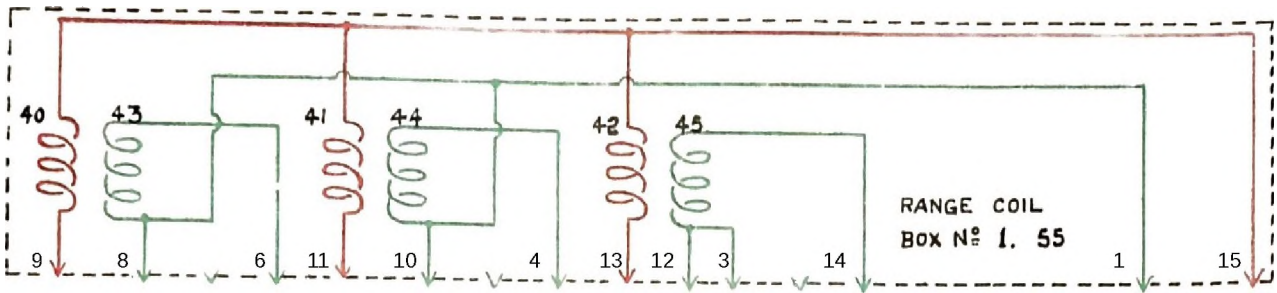



Coil Boxes

Range	Freq/kHz	Prim Ind/mH	Prim Res/ohm	Sec Ind/mH	Sec Res/Ohms	Tuning Cap/nF
5	12.5-30	116	530	95	150	2.2
4	25-75	34	240	17.3	55	2.2
3	63-150	13	95	5.5	20	1.1
2	140-335	2.02	19	1	4	1.1
1	310-550	1.12	10	0.385	1.5	0.55


Dims of coils in Range 5
 Centre piece 41.8 x 25.6mm
 Inner coil (Anode) 54.7 OD, 49.8ID x 15.8mm
 Outer coil (Grid) 78.7 OD, 56.4 ID x 18.1mm

Andrew Sinclair
 19/1/24

Coil Box Terminals

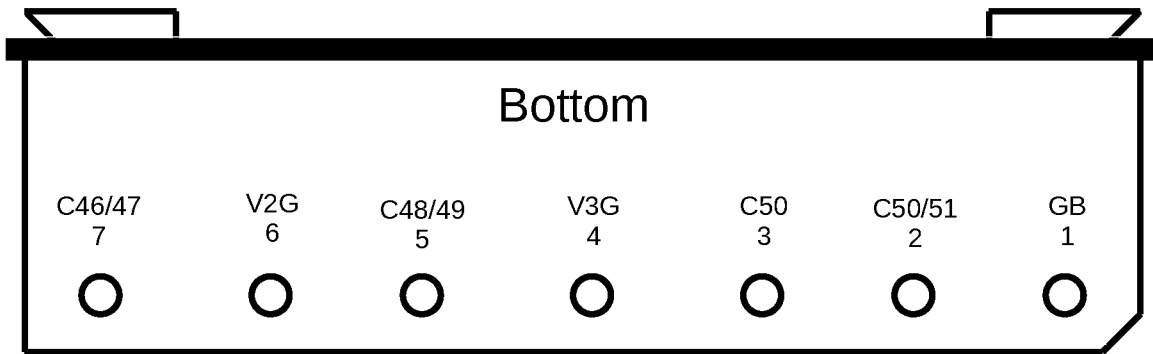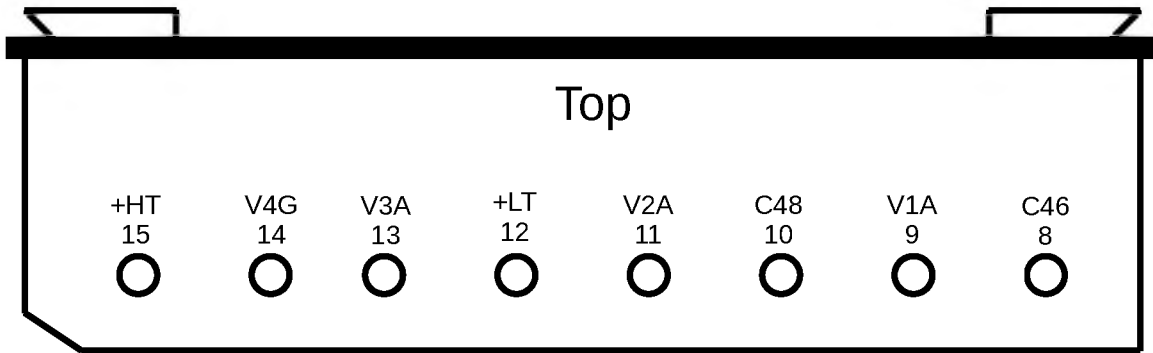

Looking at top of M11

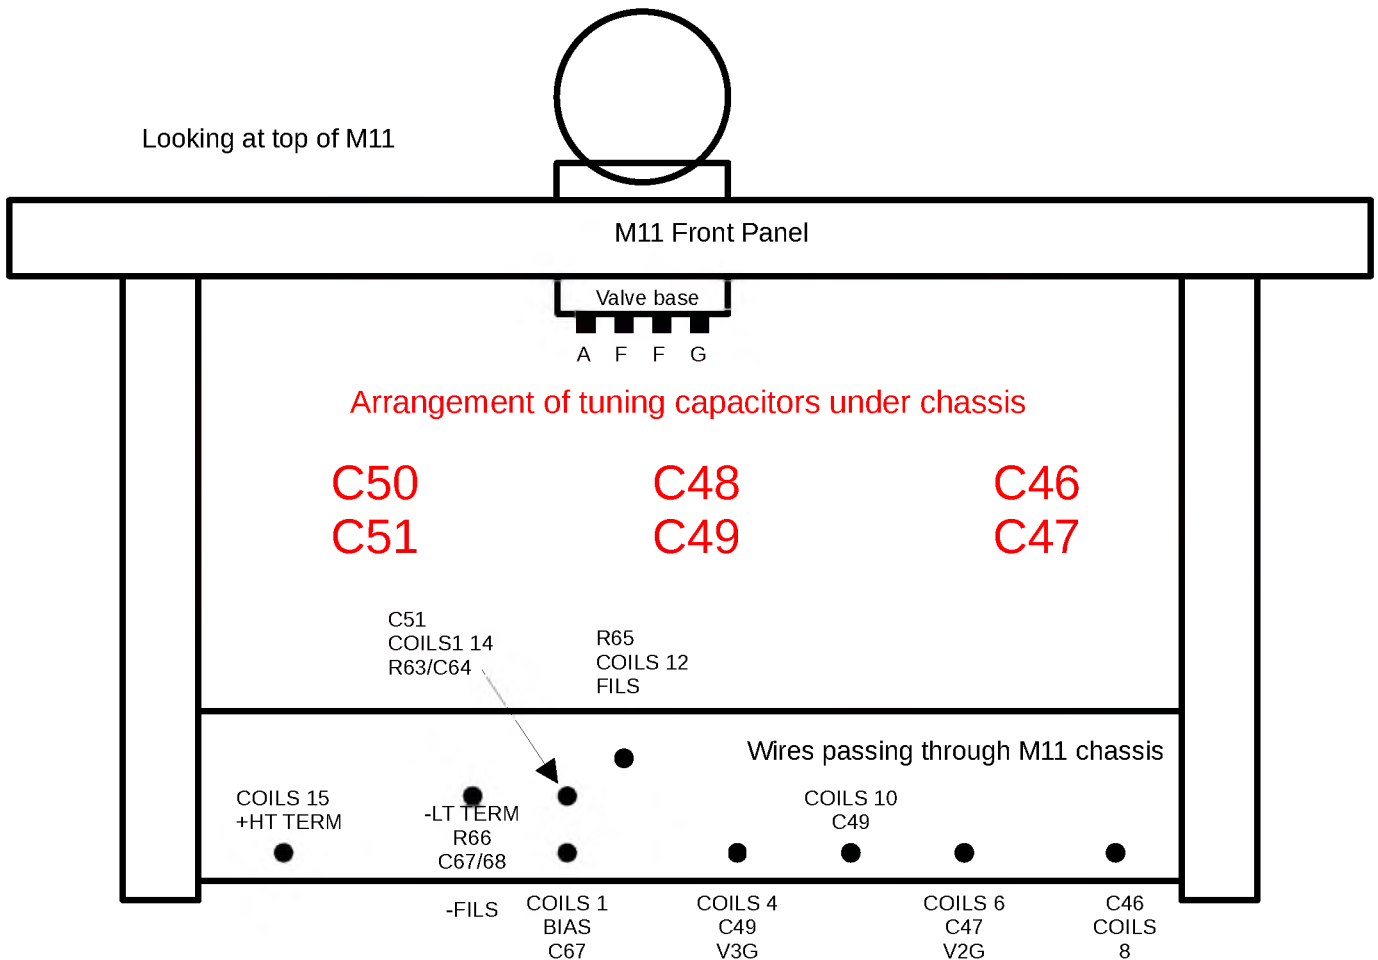

Connection on paxolin plates at rear of each pair tuning caps is junction of the two.

Item 65 referred to as R65 on this page.
Item 67 referred to as C67 on this page.

Andrew Sinclair
26/12/23