

24

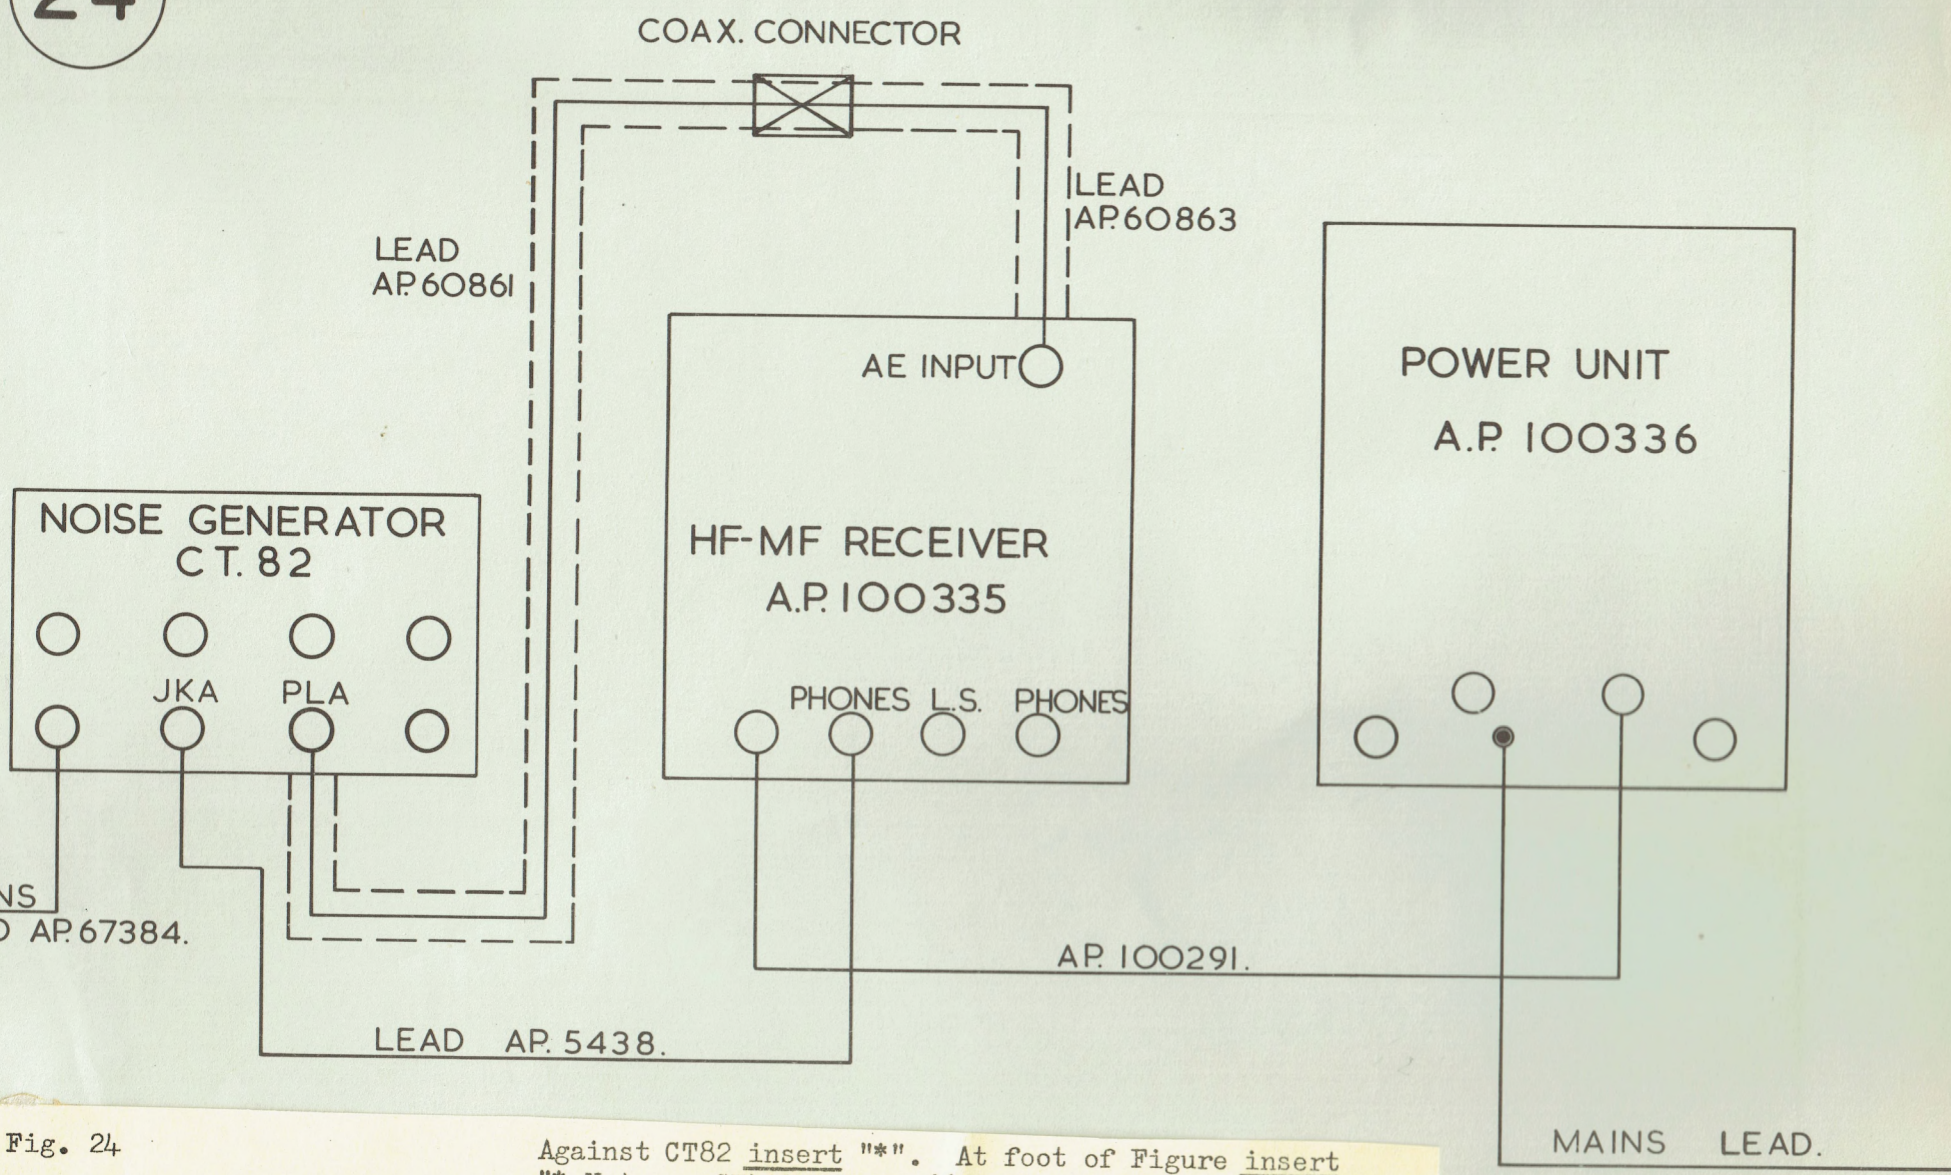


Fig. 24

Against CT82 insert "***". At foot of Figure insert
** Note:- CT410 N.S.N. 6625-99-580-1668 may also
be used, set INPUT IMPEDANCE to 600 ohm, connect
AUDIO INPUT to receiver L.S. socket for all tests
and read Noise Factor on 75 ohm scale. See
B.R.1771(43)