




RECEIVER B28

RECEIVER B 28.

C61

CONNECTIONS TO B28 WHEN USED IN TYPE 65.


SHOWING ALTERNATIVE SOURCE OF SUPPLY.

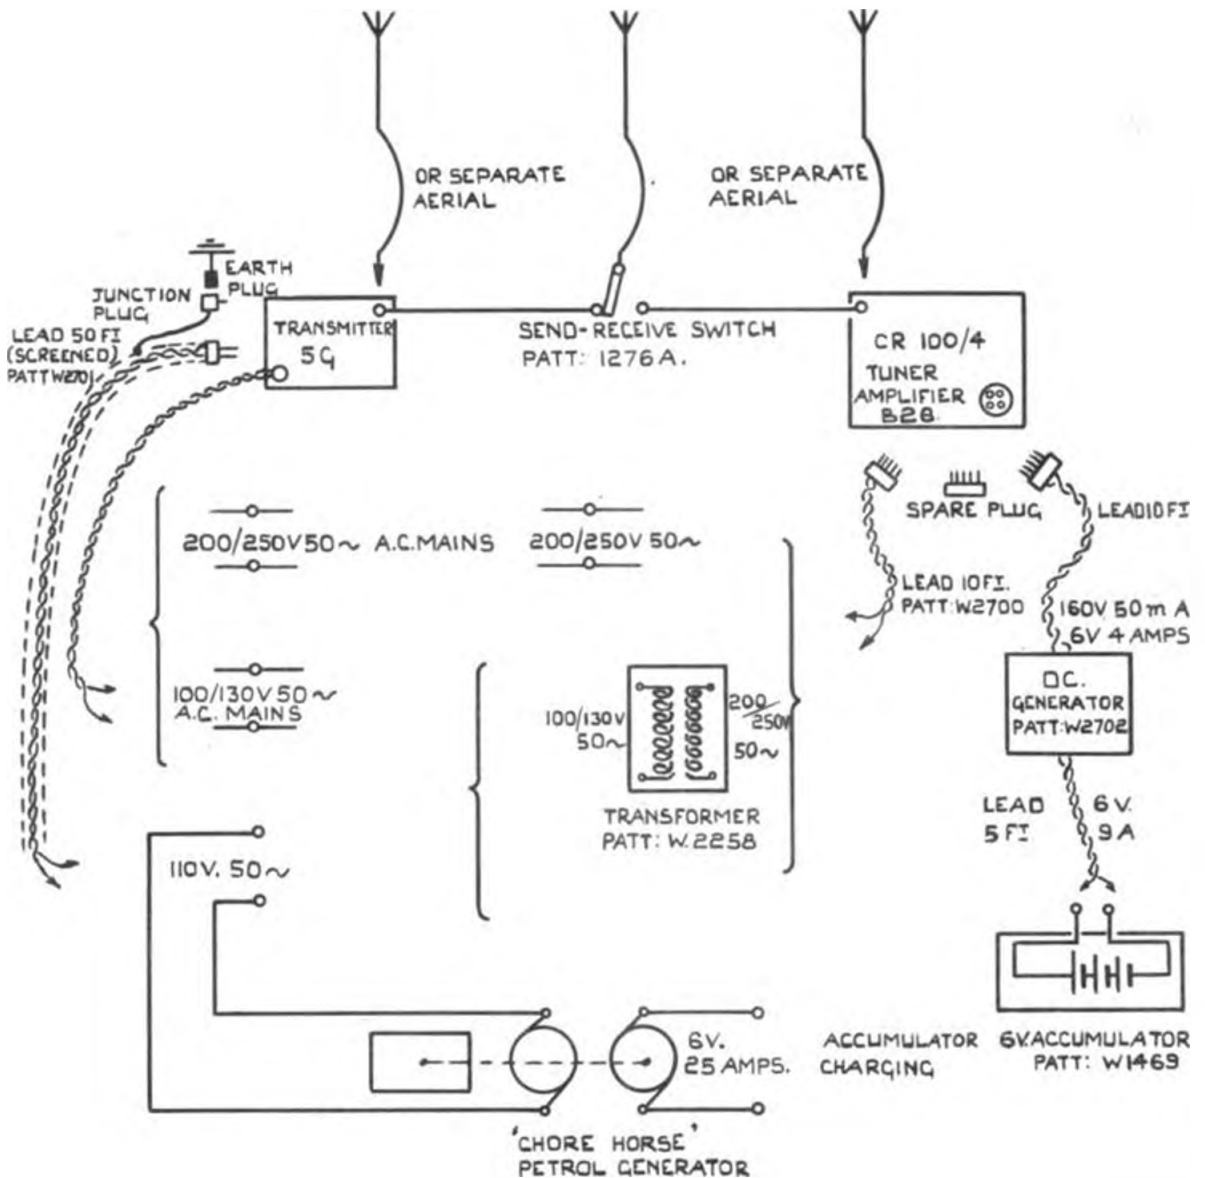

IN LATER SETS A PETROL GENERATOR GIVING 220 VOLTS INSTEAD OF 110V. MAY BE SUPPLIED, AND THE B28 ROTARY CONVERTER MAY BE REPLACED BY A VIBRATOR UNIT.

FIG. 4

B2B (MODEL OUTFIT C.D.C.) SCHEMATIC DIAGRAM

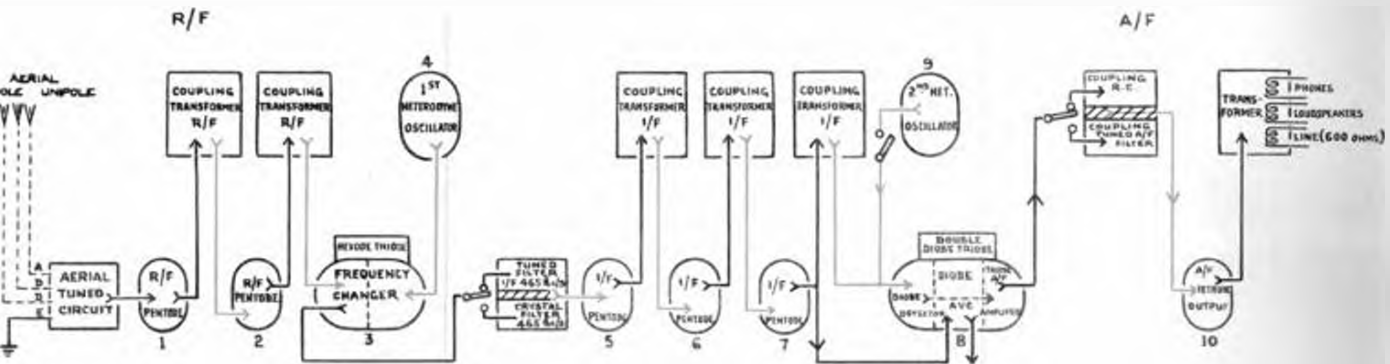

TUNER-AMPLIFIER B28

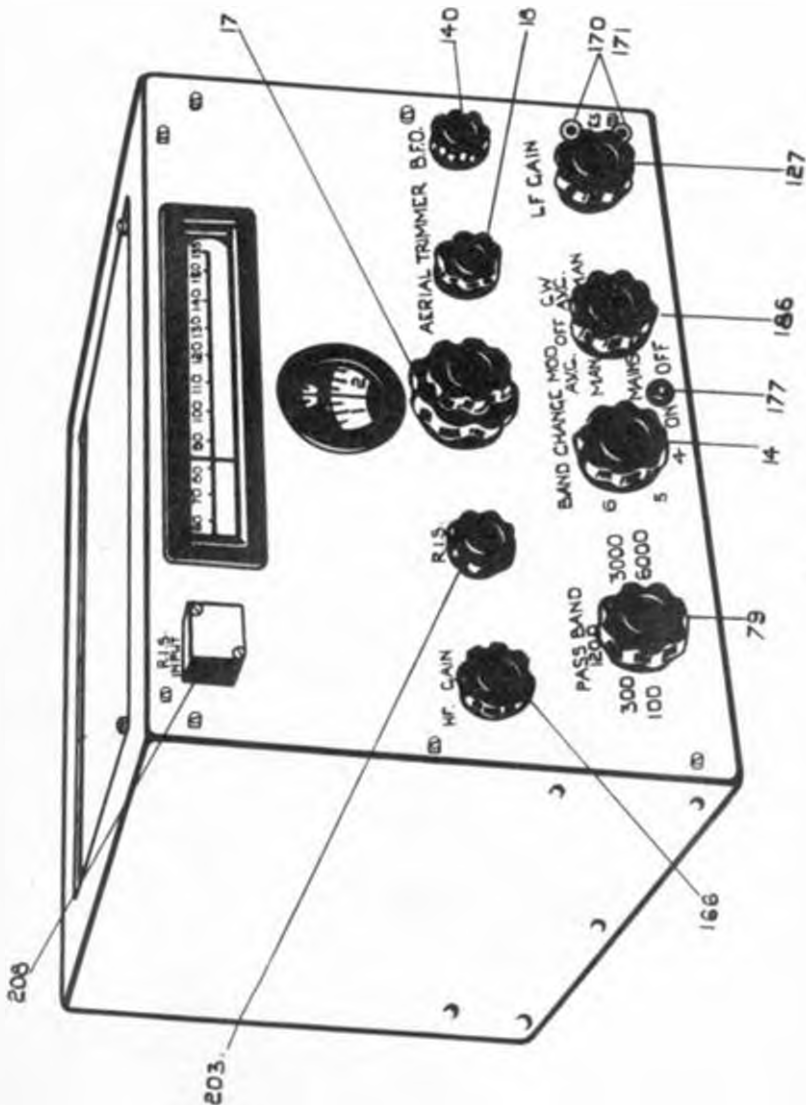


FIG. 6.