

3.7. RECEIVER OUTFIT CHC

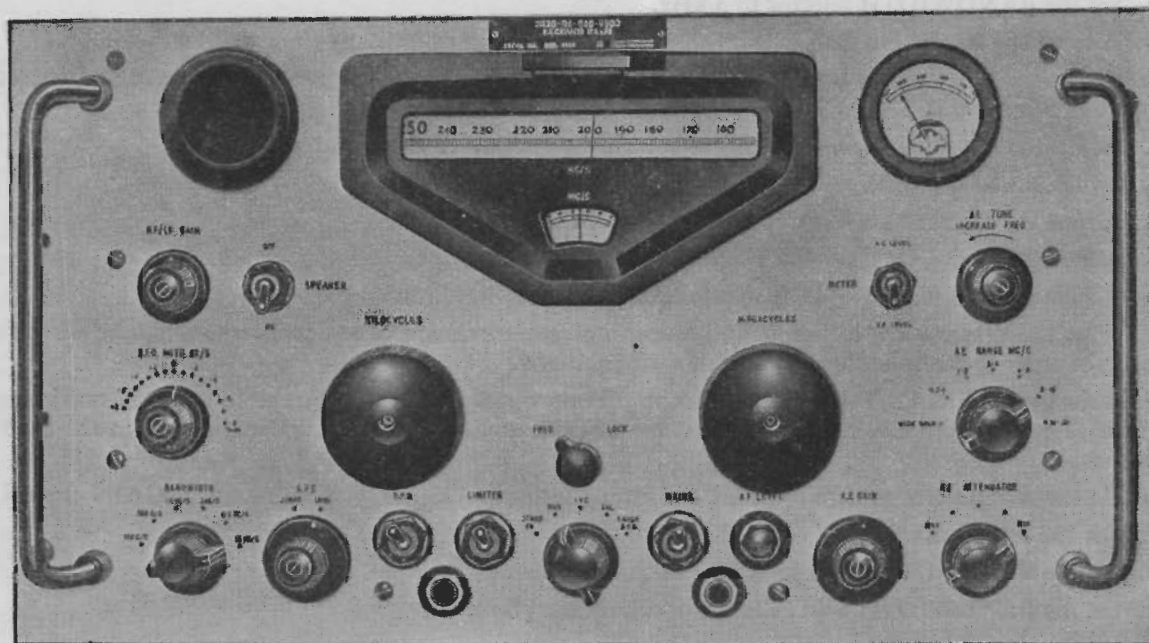


FIG. 1

DATE OF DESIGN	1958
HANDBOOK	BR 1171
E LIST	E 1212
FREQUENCY RANGE	980 kHz to 30 MHz
MAIN INTERMEDIATE FREQUENCY	100 kHz
POWER SUPPLIES	100 - 125V or 200 - 250V 45 - 65 Hz
POWER CONSUMPTION	90W
PLANNED MAINTENANCE SCHEDULE	Daily user check schedule not yet formulated